


# JT SSh(B) 440-455W

## Dual-glass Monocrystalline Solar Module

144 Cells / MBB / Bifacial Mono PERC / 1500V DC / 20.9% Maximum Efficiency

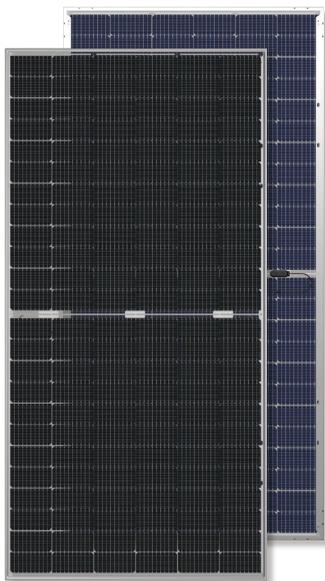

### KEY FEATURES



#### Ultra-high power output

MBB mono PERC cell technology, maximum power output 455W  
Half-cut cell layout, lower  $R_s$  loss and thermal coefficients  
Bifacial cell, additional 5%-30% more yield



#### Ultra-high reliability

Dual-glass design with POE encapsulant, no PID risk  
100% EL double inspection, stringent internal quality control



#### Excellent low light performance

Excellent low light performance on cloudy days  
mornings and evenings



#### Certified to withstand the most challenging environment

2400 Pa wind load • 5400 Pa snow load • 25 mm hail stones at 82 km/h



#### High system voltage Compatible

Maximum 1500V DC system voltage saves total system cost



#### High fire class

Fire class C certified, minimize the fire risk of the system

### QUALIFICATIONS & CERTIFICATES

- IEC 61215, IEC 61730
- ISO 9001: Quality Management System
- ISO 14001: Environment Management System
- ISO 45001: Occupational Health and Safety
- IEC 62941: Design and Manufacture of Crystalline Silicon Photovoltaic Modules

### JETION SOLAR

As a member of CNBM - a Fortune 500 company, Jetion Solar provides various product solutions, global EPC service and financing. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry. Till now, Jetion Solar has cumulatively more than 10 GW module shipment and 1 GW global EPC track records.


### WARRANTY

12 years

Product Warranty

30 years

Performance Warranty

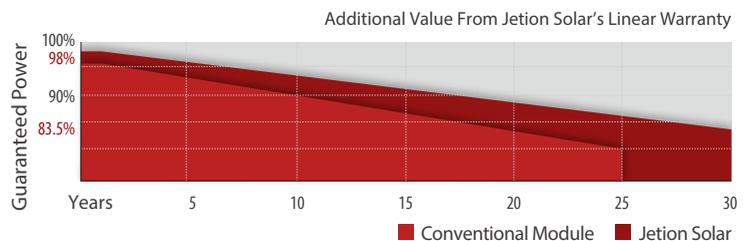


#### Jetion Solar (China) Co., Ltd.

Add: 1011 Zhencheng Road, Jiangyin, Jiangsu Province, P.R. China 214443  
Tel: +86 (510) 8668 7300 400-8868-659  
E-mail: marketing@jetion.com.cn  
Web: www.jetionsolar.com




## IV CURVES


IV Curves of JT440Ssh(B) at different irradiances

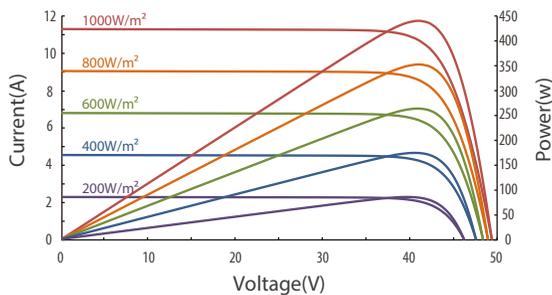

IV Curves of JT440Ssh(B) at different Temp

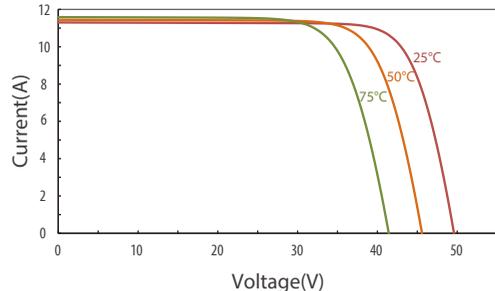

## DIMENSION

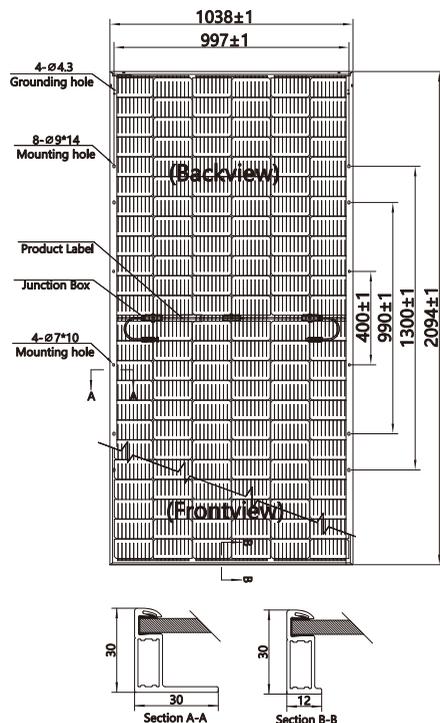

## Remarks

## ELECTRICAL DATA

TYPE (Tolerance: 0 - +5W)	JT440Ssh(B)		JT445Ssh(B)		JT450Ssh(B)		JT455Ssh(B)	
Test Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power Pmax (W)	440	327.71	445	331.74	450	335.40	455	339.47
Maximum Power Voltage Vmp (V)	41.0	38.60	41.2	38.80	41.4	39.00	41.6	39.20
Maximum Power Current Imp (A)	10.74	8.49	10.81	8.55	10.87	8.60	10.94	8.66
Open Circuit Voltage Voc (V)	49.60	46.6	49.80	46.8	50.00	47.0	50.20	47.2
Short Circuit Current Isc (A)	11.30	9.10	11.37	9.16	11.44	9.21	11.51	9.27
Module Efficiency (%)	20.2%		20.5%		20.7%		20.9%	

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5

NMOT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s

Measuring tolerance: ±3%

## REAR SIDE POWER GAIN (JT440Ssh(B))

Power Gain	5%	10%	15%	20%	25%	30%
Maximum Power - Pmax (W)	462	484	506	528	550	572
Maximum Power Voltage -Vmp (V)	41.0	41.0	41.0	41.1	41.1	41.1
Maximum Power Current -Imp (A)	11.27	11.81	12.34	12.85	13.38	13.92
Open Circuit Voltage -Voc (V)	49.6	49.6	49.6	49.7	49.7	49.7
Short Circuit Current -Isc (A)	11.83	12.37	12.9	13.41	13.94	14.48

## TEMPERATURE RATINGS

Temperature Coefficient of Isc (αIsc)	+0.048%/°C
Temperature Coefficient of Voc (βVoc)	-0.27%/°C
Temperature Coefficient of Pmax (γPmp)	-0.35%/°C
Normal Module Operating Temperature (NMOT)	41°C±3°C

## OPERATING PARAMETERS

Maximum System Voltage	1500V/DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	20A
Maximum Test Load, Push/Pull	5400Pa/2400Pa
Conductivity at Ground	≤ 0.1Ω
Safety Class	II
Resistance	≥100MΩ
Voc and Isc Tolerance	±3%
Bifaciality	70±5%

## MECHANICAL DATA

Solar Cell Type	Mono 83×166 mm(6 inches)
Number of Cells	144 [2 x (12 x 6)]
Module Dimensions	2094×1038×30 mm(82.4×40.9×1.2 inches)
Weight	27.5 kg(60.6 lb)
Front Cover	Front-High transmission, AR coated tempered glass, 2.0mm
Back Cover	High transmission, Tempered, White Grid Glass/AR coating(optional), 2.0mm
Frame	Silver, anodized aluminium alloy
J-Box	≥IP68
Cable	4.0 mm <sup>2</sup> solar cable, 300 mm(11.8 inches)
Number of diodes	3
Connector	MC4 EVO2 compatible

## PACKAGING CONFIGURATION

Module per pallet	35 pieces
Module per 40'HQ container	22 pallets, 770 pieces

\*Installation instruction must be followed. See the installation manual or contact our technical service department for further information on approved installation.

\*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Jetion Solar (China) Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. Jetion Solar\_REV\_2021\_04\_EN

